



**CITY OF GOLETA
CALIFORNIA**

ADDENDUM NO. 2

TO PROSPECTIVE BIDDERS

FY 2016/2017 PAVEMENT REHABILITATION PROJECT– OVERLAY

PROJECT NO. 02-17

March 30, 2017

Notice is hereby given that the Contract Documents for Project No. 02-17, FY 2016/2017 PAVEMENT REHABILITATION PROJECT – OVERLAY, are hereby amended as hereinafter set forth:

ITEM NO. 1

Delete the following Bid Items form all Bidding Sheets including alternatives:

Item No.	Bid Item
4	Field Survey Prior to Construction
5	Reestablish Survey Monumentation
33	Adjust Water Valve Covers to Finish Grade *

* Note: Water District will raise water valve covers

ITEM NO. 2

Delete the following sections from the Specifications

Section No.	Section Name	Page No.
39-1.09D	Geosynthetic Pavement Interlayer	F-21 to 23

ITEM NO. 3

Remove and Replace specifications pages C-6 and C-8, "Bidding Sheets" with the revised pages included herein.

ITEM NO. 4

Add the following Sections to the specifications at the end of the identified Sections.

Section 39-1.04 Contractor Quality Control

In the event that the underlying material is soft, yielding, unstable, or unsuitable, it shall be excavated to a depth of 0.5 feet below the depth required above and disposed of in accordance with these Special Provisions. The limits of removal shall be designated by the Engineer. The resulting space shall be filled with a single lift of asphalt concrete.

Unsuitable material is defined as material the Engineer determines to be:

- A. Of such unstable nature as to be incapable of being compacted to specified density using ordinary methods at optimum moisture content, or*
- B. Too wet to be properly compacted and circumstances prevent in-place drying prior to incorporation into the work, or,*
- C. Otherwise unsuitable for the planned use.*


Section 39-6 Payment

Measurement and Payment for "6" Deep Lift Stabilization (Allowance)" shall be on a unit cost basis as indicated in the bid schedule. The unit costs shall include full compensation for removal of unsuitable subgrade and placement and compaction of six (6") inches of hot mix asphalt (HMA). Payment for this item shall only be made on an allowance basis and only for the work completed. The Contract shall have no claim to that portion of the allowance which is not necessary for the project.

ITEM NO. 5

Add the following work limits and detail to the project plans: Shoulder Backing. Shoulder backing is located on the south side of Calle Real from Winchester Canyon Road westerly to the limits of work on Calle Real.

Shoulder Backing Detail:

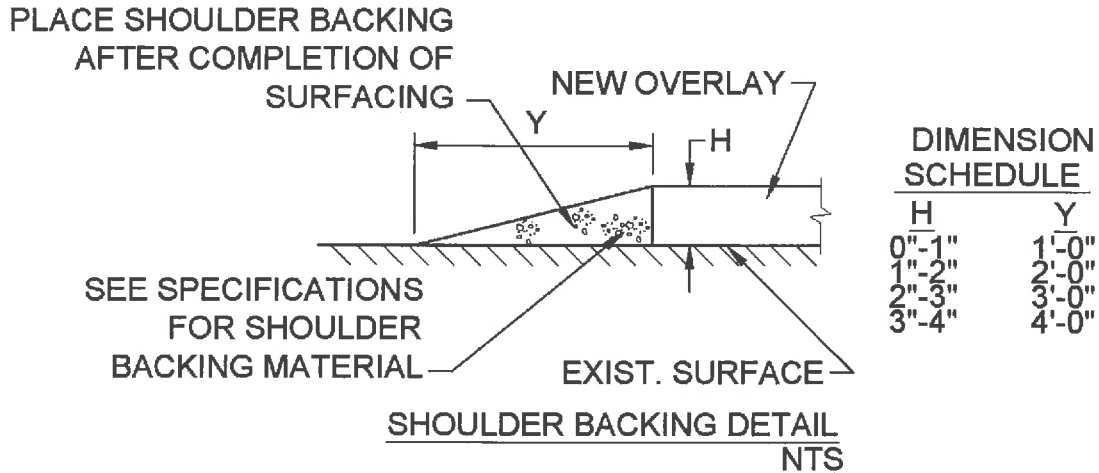

ITEM NO. 6

Add the following Abbreviation List to the project plans:

Abbreviations for Plans	
Abbreviations	Definition
AB	Aggregate Base
AC	Asphalt Concrete
C&G	Curb and Gutter
CL	Centerline
COP	Change of Pavement
DI	Drain Inlet
E/EX.	Existing
HMA	Hot Mix Asphalt
Min.	Minimum
NTS	Not to Scale
OC	On Center
PCC	Portland Cement Concrete
PG	Performance Grade
RC	Relative Compaction
RPM	Retroreflective Pavement Marker
TR	Terminal Blend
TYP.	Typical



Rosemarie Gaglione, P.E.
Public Works Director

- END OF ADDENDUM NO. 2 -

**CITY OF GOLETA
FY 2016-2017 PAVEMENT OVERLAY PROJECT
BASE BID**

BIDDING SHEET

BIDDER: _____

ITEM NO.	BID ITEMS	PAYMENT REFERENCE	UNIT	TOTAL QUANTITIES	UNIT PRICE	*TOTAL COST
1	Mobilization, Bonds & Insurance		LS	1		
2	Traffic Control		LS	1		
3	Storm Water Pollution Control Program		LS	1		
4	Field Survey Prior to Construction		LS	1		
5	Reestablish Survey Monumentation		EA	18		
6	3/8" HMA (Type A, PG 76-22 TR)		TON	748		
7	1/2" HMA (Type A, PG 64-10)		TON	12,969		
8	Digout or Remove & Replace 3" HMA		SF	7,724		
9	Cold Plane & Remove 2-1/2" HMA		SF	12,572		
10	Cold Plane & Remove 3-1/2" HMA		SF	59,234		
11	Cold Plane & Remove 4" HMA		SF	123,078		
12	Cold Plane & Remove 4-1/2" HMA		SF	66,480		
13	Cold Plane & Remove 5" HMA		SF	48,625		
14	Cold Plane & Remove 5-1/2" HMA		SF	75,500		
15	Cold Plane & Remove 8-1/2" HMA		SF	44,663		
16	Construct New Median		EA	1		
17	Pulverize 11" Existing Section, Regrade and Recompact		CF	112,822		
18	Cement Treat Soil to 7" Depth		SF	123,078		
19	6" Deep Lift Stabilization (Allowance)		SF	14,632		
20	Keycut A1 (5')		LF	4,321		
22	Keycut B2 (20')		LF	312		
23	Shoulder Backing		LF	1,764		
24	Remove & Replace PCC C&G		LF	95		
25	Prepare & Repaint Existing Curb Red		LF	95		
26	Blue RPM @ Hydrant		EA	12		
27	Lower Manhole Covers Prior to Cold Plane		EA	45		
28	Lower Gas Valve Covers Prior to Cold Plane		EA	1		
29	Lower Water Valve Covers Prior to Cold Plane		EA	50		
30	Lower Utility Covers Prior to Cold Plane		EA	7		
31	Adjust Manhole Covers to Finish Grade		EA	45		
32	Adjust Gas Valve Covers to Finish Grade		EA	1		
33	Adjust Water Valve Covers to Finish Grade		EA	50		
34	Adjust Utility Covers to Finish Grade		EA	7		
35	Install 12" White Crosswalk/Limit Line		LF	2,042		
36	Install Caltrans Striping Detail - 8 (Paint & Markers)		LF	2,617		

**CITY OF GOLETA
FY 2016-2017 PAVEMENT OVERLAY PROJECT
ALTERNATE 1**

BIDDER: _____

ITEM NO.	BID ITEMS	PAYMENT REFERENCE	UNIT	TOTAL QUANTITIES	UNIT PRICE	*TOTAL COST
1	Mobilization, Bonds & Insurance		LS	1		
2	Traffic Control		LS	1		
3	Storm Water Pollution Control Program		LS	1		
4	Field Survey Prior to Construction		LS	1		
5	Reestablish Survey Monumentation		EA	2		
7	1/2" HMA (Type A, PG 64-10)		TON	2,461		
8	Digout or Remove & Replace 3" HMA		SF	7,916		
10	Cold Plane & Remove 3-1/2" HMA		SF	112,517		
24	Remove & Replace PCC C&G		LF	74		
25	Prepare & Repaint Existing Curb Red		LF	74		
26	Blue RPM @ Hydrant		EA	4		
27	Lower Manhole Covers Prior to Cold Plane		EA	9		
29	Lower Water Valve Covers Prior to Cold Plane		EA	7		
30	Lower Utility Covers Prior to Cold Plane		EA	1		
31	Adjust Manhole Covers to Finish Grade		EA	9		
33	Adjust Water Valve Covers to Finish Grade		EA	7		
34	Adjust Utility Covers to Finish Grade		EA	1		
35	Install 12" White Crosswalk/Limit Line		LF	170		
38	Install Caltrans Striping Detail - 12 (Paint)		LF	3,951		
41	Install Caltrans Striping Detail - 25 (Paint & Markers)		LF	3,870		
42	Install Caltrans Striping Detail - 27B (Paint)		LF	3,121		
44	Install Caltrans Striping Detail - 38 (Paint & Markers)		LF	629		
46	Install Caltrans Striping Detail - 39 (Paint)		LF	3,179		
47	Install Caltrans Striping Detail - 39A (Paint)		LF	806		
48	Arrow - Type IV (Paint)		EA	3		
50	Install "BIKE LANE" Legend with Arrow (Paint)		EA	4		
59	Install "40" Legend (Paint)		EA	2		

TOTAL

ALTERNATE 1 BID TOTAL AMOUNT IN FIGURES:

ALTERNATE 1 BID TOTAL AMOUNT IN WORDS:

*NOTE: In case of error in extension of price into the total price column, the unit price will govern.